

Application configuration

<https://wiki.czechidm.com/>

2020/07/08 13:41

Table of Contents

- Application configuration** 1
 - Configuration file*** 1
 - Application settings in GUI*** 1
- Read more** 1
 - Admin tutorials*** 2
 - Admin guide*** 2
 - Devel guide*** 2


Application configuration

Configuration file

CzechIdM configuration is in the file **application.properties**. This configuration is read at the application start. If changed, new options will be applied after application restart.

Application settings in GUI

All keys in configuration file can be overridden via CzechIdM GUI . If the configuration property is set, the change take place instantly. After next application restart, values set via GUI still holds and has higher priority that those stored in configuration files. Of course administrators can define also keys that are not present in the configuration file.

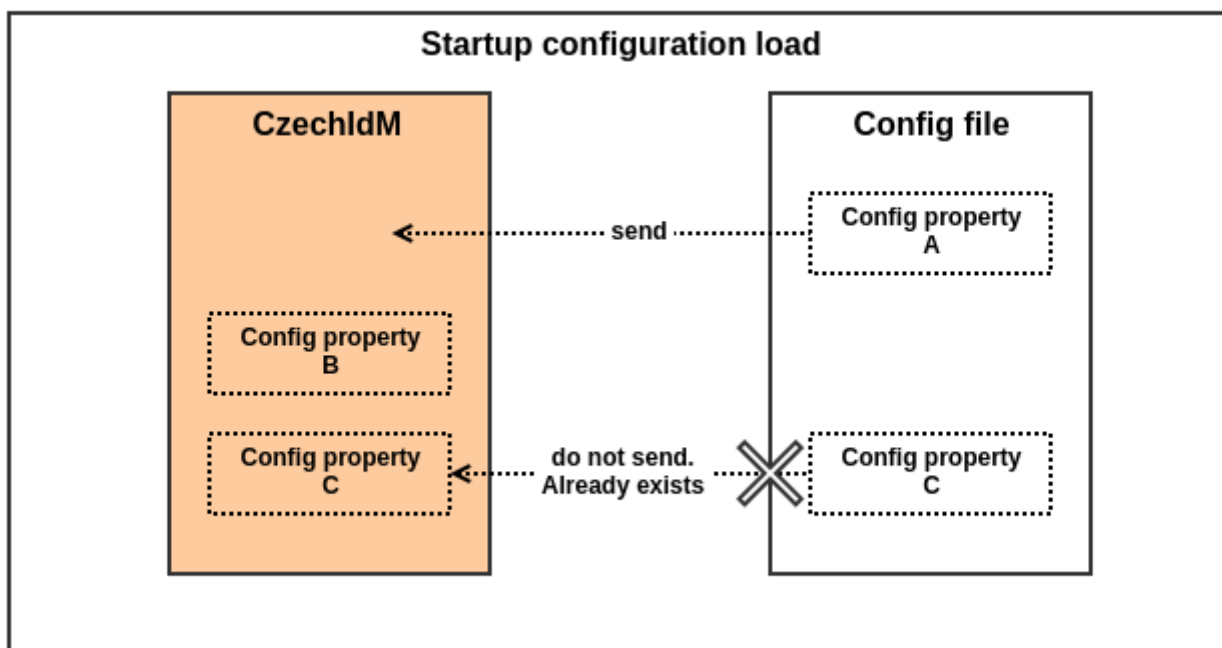

CzechIdM can also store the value in the confidential storage, it means that the value is not visible in GUI (only star signs represent the value) and the application keeps the reference into encrypted storage. If the value is to be used, the application use the reference and get the value for temporary usage.

Read more

Admin tutorials

- [CzechIdM configuration in GUI and config files](#)
- [Personalize localization](#)

Admin guide

- [Events overview](#)
- [Configuration overview](#)

Devel guide

- [Events - processors configuration](#)
- [Backend configuration](#)
- [Frontend configuration](#)
- [Tasks scheduler](#)
- [Long running tasks](#) (to be deleted, a copy was created under admin guide)
- [Dynamic forms \(eav\)](#)

From:

<https://wiki.czechidm.com/> - **CzechIdM Identity Manager**

Permanent link:

https://wiki.czechidm.com/9.5/documentation/application_configuration

Last update: **2019/03/01 09:08**

